


# TECHNICAL DATA SHEET

## CLEAR POLYESTER FILM TAPE

### CONSTRUCTION

**Nova Films & Foils, Inc. NF1503** is a 3 mil clear polyester tape with a 3 mil pressure sensitive acrylic adhesive.

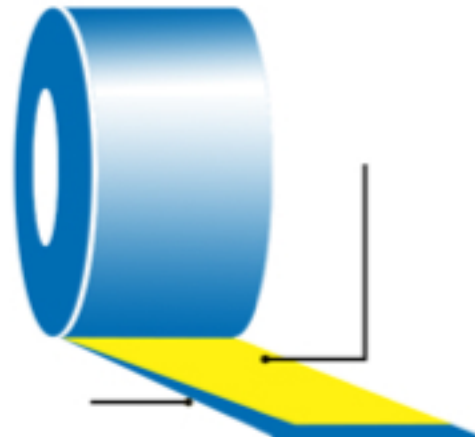

### APPLICATION

The extra tacky adhesive and polyester are good for seaming materials together and/or general bonding. The heavy adhesive coatweight adheres well to rough or more porous substrates and has a high peel adhesion value.

### PHYSICAL PROPERTIES

Adhesive Thickness	3.0 mils
Face film	Clear Polyester
Face Thickness	3.0 mils
Loop Tacks - Stainless Steel	160 oz/in
Adhesion - 180° Peel from SS	135 oz/in
Application temperature	60°F to 90°F
Service temperature	-20°F to 200°F

### PREPARATION

All surfaces must be clean, dry and free of oil, dust or grease before application.

### SHELF LIFE

One year when stored at 72°F at 50% RH.

**NOTE:** Published material and information concerning Nova Films & Foils, Inc. products are based upon research which the company believes to be reliable, but such material and information does not constitute a warranty. Because of the variety of possible uses for Nova Films & Foils, Inc., products and the continuing development of new uses, the buyer should carefully consider the fitness and performance of the product for each intended use and the buyer assumes all risks in connection with such use.



### Nova Films & Foils, Inc.

11 Industry Drive | Bedford, OH 44146

Toll Free: (800) 950-6334 | Phone: (440) 201-1300 | Fax: (440) 201-2240

www.novafilmsusa.com | sales@novafilmsusa.com